

# 1 Introduction

## 1.1 Summary

This manual is mainly on how to install this software and how to use it.

The main functions of the software:

- Real-time Monitoring Function;
- PTZ Control Function;
- Local Record and Snapshot Functions;
- Alarm Prompting Function.

## 1.2 Runtime Environment

Requires IOS 5.0 or higher, support iPhone,iPod touch etc.

# 2 Installation and Operating Instructions

## 2.1 Installation

Search VSSMobile in the appstore, click "install" button,it will install by itself. After installing the program


icon will appear, as shown below:




## 2.2 Operating Instructions

### 2.2.1 Devices List and Preview Instructions

Run VSSMobile program, it will show you Home interface as below:

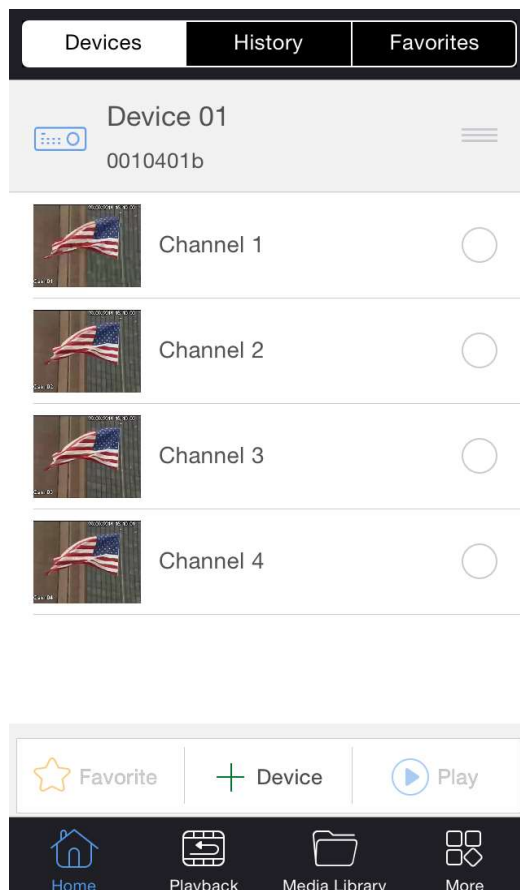

Click **+ Device** button to add device. You can add device through IP/P2P/domain. Input device information, then click “save” button to save device information. Choose channel to start live preview:

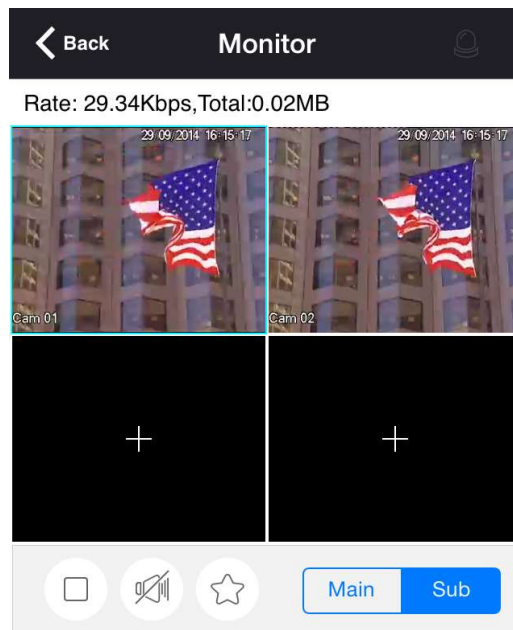













You can click **+** button to open one camera in selected window. It supports up to 4 channels preview, so other channels' enable cannot be selected after you have chosen 4ch to preview. Click the screen will display the PTZ control panel when single-screen previewing.:


Note: In the preview screen you can add multiple channels, it will add camera one by one start from the channel had not added a video when adding multiple channels (such as: 1, 3, 4 channel had not added a video, it will display the video on the 1<sup>st</sup> and 3<sup>rd</sup> screen although you choose the 4<sup>th</sup> screen to add 2 channels to live preview. If you add only one channel, the camera will be opened in selected window)

You can do the following operations when live preview.

Icons	Name	Description
	Stop	Close the current video

	Audio	Audio on/off
	Favorite Group	Add channel to device favorites
	Channel	Change the video of the current window
	Snapshot	Snapshot the selected window
	Two-way talk	Start/stop two-way talk
	PTZ control	Start/stop PTZ control
	PTZ direction control	Up/Down/Left/Right move control
	Focus	PTZ focal length adjustment
	Zoom	Adjust the PTZ screen size
	Aperture	Adjust the PTZ screen bright and dark
	Record	Start/stop record of selected window
	Alarm	Receive DVR alarm information (when alarm button light)

## 2.2.2 Device Manager

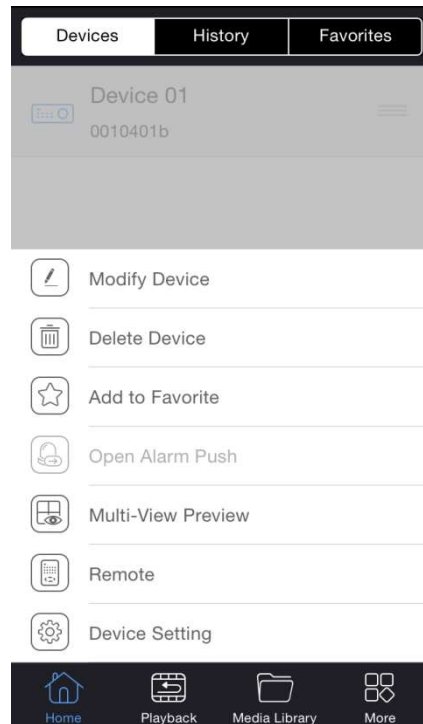

Edit device: Edit device name, password etc.



Delete device: Delete device



Favorite Group: Add channel to favorite group



Open the alarm push: Turn on or off the device's alarm push function (this function in subsequent editions)




Multi-channel Preview: Multi-channel Live Preview



The picture shows the multi-channel preview screen, button below the picture window enables switching of channels.



Remote Control: The device can be set up for remote operation.

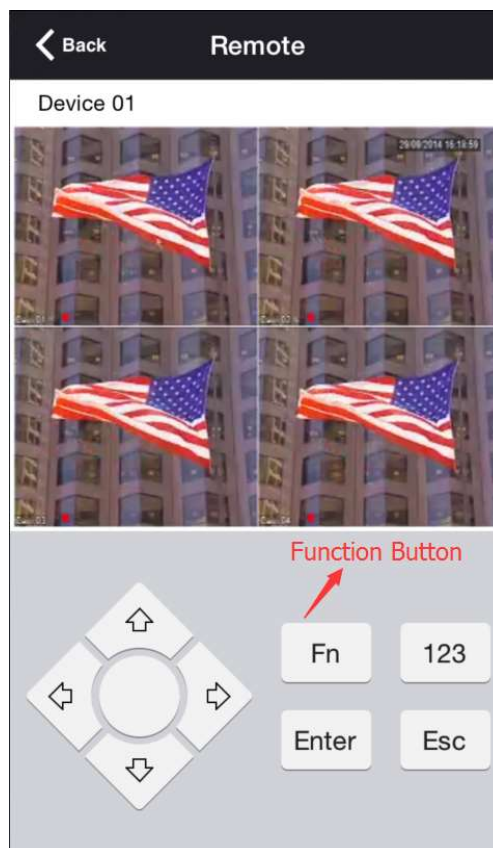

Device setting: Set device local parameters

**Device Setting** (Back | Save)

**ENCODING SCHEME** → Local code setting (Audio Setting) → Open/Close audio after choosing the channel and stream type →

- Channel: [ 1 | 2 ]
- Stream: [ Main | Sub ]
- Open Audio:

**NETWORK SCHEME** → Enable local alarm push functions. →

- Mobile Push:

**ALARM SCHEME** → Local alarm linkage setting: → Choose the channel, → then open/close the enable →

- Channel: [ 1 | 2 ]
- Local:  Cloud
- Motion:  Cloud
- Lost:  Cloud
- Blind:  Cloud

## 2.2.3 History

History Interface:

Devices | **History** | Favorites

2014-09-29

	Device 01 0010401b	Channel 1 16:14:58	<input type="checkbox"/>
	Device 01 0010401b	Channel 2 16:14:58	<input type="checkbox"/>
	Device 01 0010401b	Channel 3 16:13:59	<input type="checkbox"/>
	Device 01 0010401b	Channel 4 16:13:59	<input type="checkbox"/>


Favorite | Play

Home | Playback | Media Library | More

Recording all channels played before (Up to 4 simultaneous selection, recording order by date → time) ,you can select channel to preview,then click "play" button, also you can click on favorite button to add the channel to favorite group.

## 2.2.4 Favorite

Favorite Interface:

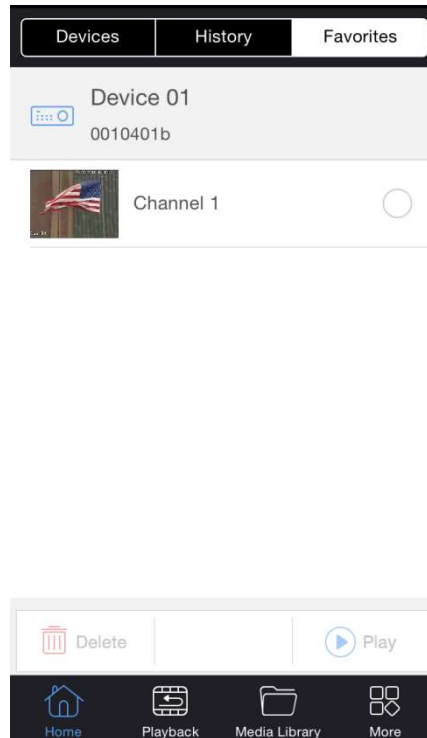


All Favorite channels can be chosen arbitrarily (up to 4 simultaneous selection), you can delete channel,live preview channel.

## 2.3 Playback

### 2.3.1 Search Settings

Playback Interface:



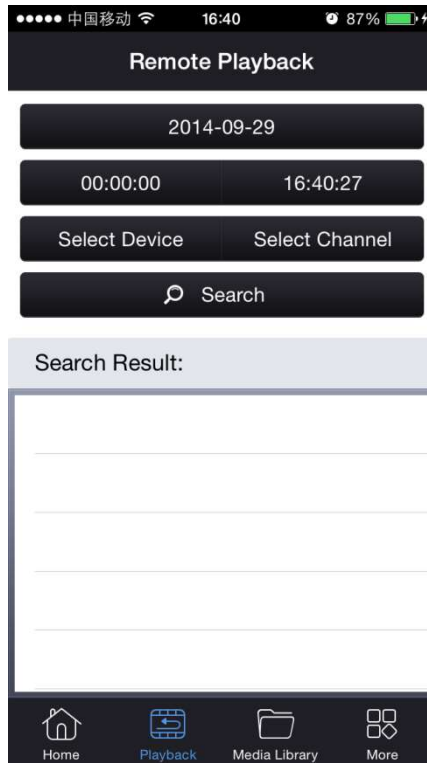

Choose date, start time, stop time, device, channel to search. Double-click the record to start playback.

Setting Interface:




Choose record to playback:



## 2.3.2 Playback Setting

Playback Interface:

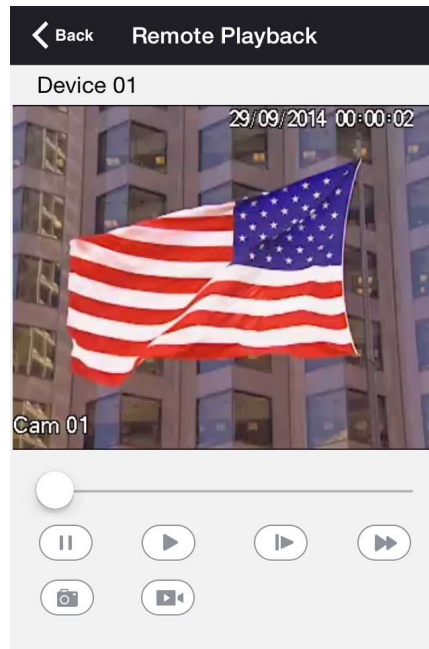


Playback operation:



## 2.4 Media Library

Media Library Interface:

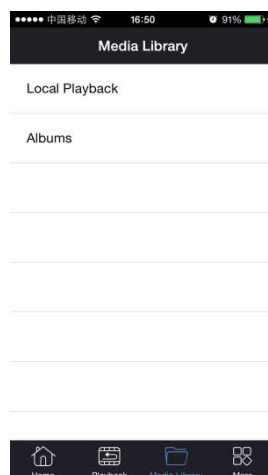

## 2.4.1 Local Playback

You can playback all video recording and live view record saved,you can select the playback.

## 2.4.2 Albums

You can view all the snapshots you have saved.

## 2.5 More


┆ 【System Settings】

【more】 == ┆ 【Version】

┆ 【Operating Instructions】

### 2.5.1 System Settings

System Settings Interface:

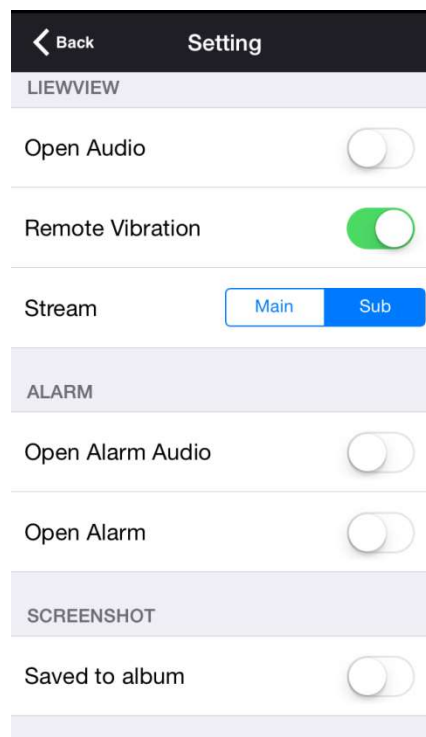

Live Preview:

【Audio】 Open/close live preview audio

【Remote Vibration】 On/off vibration when using the remote control

【Main/Sub Stream】 Setting the default stream for live preview

Alarm:

【Alarm Audio】 Open/close voice prompts when the alarm

【Alarm Prompt】 Open/close the state prompts when the alarm

Snapshot:

【Save to the system album】 Setting live preview or playback shots, whether synchronous saved to the phone album.

## 2.5.2 Version Information

Introduce mobile client version information

## 2.5.3 Operating Instructions

This is a brief introduction for Functions of vssmobile.

# 3 Feedback

When using this product, if there is any logical or functional problems, or good suggestion, please contact us.

Contact: mail

E-mail Add:[support@vssweb.net](mailto:support@vssweb.net)